

## DMU-25/30/40/60 TOUCH II MEDIUM SPIN WASHER EXTRACTORS



### TOUCH II

User friendly and totally programmable 7" Touch II  
USB Connection. PC software free of charge for  
programming, traceability, data analysis...  
Videos on display (ads, instructions)  
37 languages  
8 dosing signals as standard



### G FACTOR

High G-Factor:  
G-FACTOR 300 for medium spin washers



### EFFICIENCY

Intelligent consumption  
Optimal loading  
Water Recovery tanks ready: ECOTANK  
Low water consumption



### VERSATILITY

Make to order: customization  
OPL < > COIN  
Electric < > Hot water  
Drain valve < > Pump  
Wet cleaning features



### CONNECTIVITY

Remote technical service  
Management of laundries: OPL and COIN  
Remote payment



### ERGONOMICS

Biggest door diameters: Ø 14" (for DMU-25/30) and Ø  
18" (for DMU-40/60)  
Easy opening/closing system for door lock



### MAINTENANCE

Hinged panel: easy access to parts  
Equivalent parts for all models: contactors, gear,  
electronic devices  
Technical menu: traceability, error diagnosis



### OTHERS

Grey skinplate outer casing  
Drum and tub in stainless steel AISI 304  
Detergent dispenser with 4 compartments  
Electronic control of imbalance with frequency  
control  
LOADING AID feature: water and rotation control  
CE and WRAS approved product. Option ETL




### OPTIONS

- Double drain (for DMU-40/60)
- External double drain 3" (recommended for DMU-25/30)
- Normally closed valve
- Water RE-CYCLE: recirculation of bath water
- Relay card with 6 extra dosing signals: up to 14 signals
- Printer
- DomusConnect communication
- Silicone gasket
- Reversible door opening
- Steam kit to transform an E or HW or heated machine into steam version
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Anchoring base
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin/token kit
- Delayed door opening in case of power outage

TECHNICAL DATA	UNIT.	DMU - 25 TOUCH II	DMU- 30 TOUCH II	DMU - 40 TOUCH II	DMU - 60 TOUCH II				
<b>DRUM</b>									
Load capacity	lb	25	30	40	60				
Volume	CU.FT	3.5	4.6	6	9				
Diameter	in	24.4	24.4	27.55	30.31				
Depth	in	13	16.92	18.50	20.87				
<b>GENERAL DETAILS</b>									
Washing speed / Spining speed	r.p.m.	50/929	50/929	45/874	40/836				
G Factor	-	300	300	300	300				
Maximum force transmitted	KN	2,08 ±5	2,36 ±6	2,77 ±8	3,96 ±10				
Frequency-dynamic force	Hz	12,66	12,66	12	11,5				
Noise level	dB	<70	<70	<70	<70				
Coin laundry version	-	Yes	Yes	Yes	Yes				
Double drain	-	Opt (external)	Opt (external)	Opt	Opt				
Weighing system / Tilting system	-	No/No	No/No	No/No	No/No				
<b>DOOR</b>									
Height center door / Height door	in	22/12.2	22.44/12.2	25.78/13.70	27.56/15.75				
Diameter	in	14.68	14.68	18.11	460				
<b>POWER</b>									
Motor	Hp	1,48	1,48	2,9	4				
Electric heating power	kW	6	9	12	18				
Total electric power (electric model)	kW	6,25	9,5	12,75	19				
Total electric power (hw, steam model)	kW	1,1	1,1	2,2	3				
<b>CONNECTIONS</b>		ELECTRIC	STEAM/ HOT WATER	ELECTRIC	STEAM/HOT WATER	ELECTRIC	STEAM/HOT WATER	ELECTRIC	STEAM/HOT WATER
Tension 230V- I + N + T	Nº x mm2 / A	3 x / 32A	3 x 1,5 / 6A	3 x 10 / 50A	3 x 1,5 / 10A	3 x 16 / 63A	3 x 1,5 / 10A		3 x 1,5 / 16A
Tension 230V- III + T		3 x 2,5 / 20A	-	3 x 4 / 25A	-	3 x 6 / 40A	-	3 x 10 / 50A	-
Tension 400V- III + N + T		3 x 1,5 / 10A	-	3 x 1,5 / 16A	-	3 x 2,5 / 20A	-	3 x 4 / 32A	-
Steam inlet (Steam model)	inch	1/2"		1/2"		1/2"		3/4"	
Maximum steam consumption (Steam model)	lbs/h	15.5		18.8		26.5		33	
Water inlet	inch	3/4"		3/4"		3/4"		3/4"	
Water main pressure	Kg/cm <sup>2</sup>	2-4		2-4		2-4		2-4	
Maximum water consump.*	Gal/h	16.24		20.81		26.5		45.52	
Drain	inch	3"		3"		3"		3"	
Drainage capacity	Gal/min	52.8		52.8		52.8		52.8	
<b>DIMENSIONS / PACKING DIMENSIONS</b>									
Net Width / Gross Width	in	28.3/31.5		28.5/31.5		31/33		34.80/36.62	
Net Depth / Gross Depth	in	26.9/39		32.67/39		33/39.76		39.80/45.28	
Net Height / Gross Height	in	45.54/53.14		45.59/53.14		51.45/59		52.76/59.98	
Net weight / Gross weight	lb	478/496		526/545		620/664		749/816	
Volume	ft3	37.0		37.0		40		56.5	

\* N°20 Program, 75% load

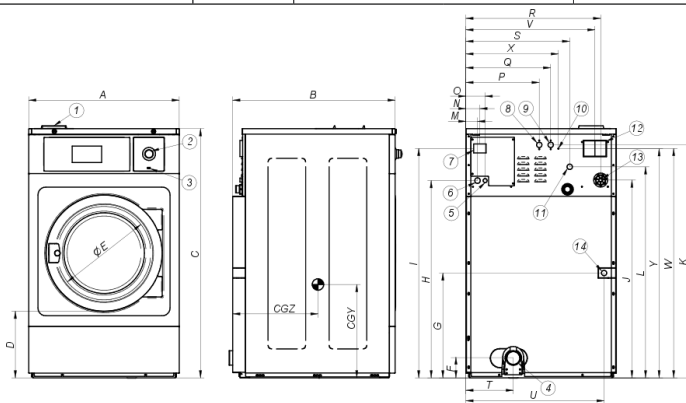

- 1 SOAP DISPENSER
- 2 EMERGENCY STOP
- 3 USB PORT
- 4 DRAIN
- 5 ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 6 ELECTRICAL CONNECTION
- 7 MAIN SWITCH
- 8 AUXILIAR WATER INLET
- 9 HOT WATER INLET
- 10 EQUIPOTENTIAL CONNECTION
- 11 COLD WATER INLET
- 12 BLUR OUTPUT / WATER OVERLOAD
- 13 LIQUID SOAP CONNECTION
- 14 STEAM CONNECTION

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
DMU-25	28.31	26.93	45.59	12.20	14.69	5.67	17.32	34.88	41.50	35.00	42.24	37.72	2.40	2.91	3.98	12.44	14.80	25.08	18.70	8.31	25.75	23.90	42.24	16.69	44.02	15.08	20.12
DMU-30	28.31	32.68	45.59	12.20	14.69	5.67	17.32	34.88	41.50	35.00	42.24	37.72	2.40	2.91	3.98	12.44	14.80	25.08	18.70	8.31	25.75	23.90	42.24	16.69	44.02	15.08	20.12
DMU-40	31.02	33.07	51.46	13.70	18.11	4.25	21.73	40.75	47.36	40.87	48.11	43.58	2.40	2.91	3.98	15.16	17.52	27.80	21.42	9.80	28.50	23.61	47.36	19.09	47.32	18.86	21.50
DMU-60	34.80	39.80	52.76	15.75	18.11	5.71	21.57	41.85	48.43	41.93	49.21	44.69	2.40	2.91	3.98	16.85	20.00	31.54	25.16	10.55	32.36	23.62	48.57	19.09	47.32	21.38	23.27